



10/519116  
Pot/G/2003/002748

Rec'd POF/PTO

23 DEC 2004

INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales

NR10800 AUG 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *AmBrenner*

Dated 29 July 2003

# The Patent Office

26JUN02 E72868151 001038  
P01/7700 0.00-0214704.9

1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE

A

26 JUN 2002

NEWPORT

The Patent Office  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference P303244GB

2. Patent application number  
(The Patent Office will fill in this part)

0214704.9

26 JUN 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Mr Michael J STUBBS  
Postlip House  
Winchcombe  
Nr. Cheltenham  
Gloucestershire  
GL54 5AH  
United Kingdom

Patents ADP number (if you know it)

688956 2002

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

Snap Fastener for use with Fabrics

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS  
Goldings House  
2 Hays Lane  
London  
SE1 2HW

Patents ADP number (if you know it)

1776001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

NO

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 5 ✓  
Claim(s) 2 ✓  
Abstract 1 ✓  
Drawing (s) 4 + 4

cf

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature L. H.

Date 25-6-01

12. Name and daytime telephone number of person to contact in the United Kingdom Keith Tart 0121 245 3900

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

1

P303244GB

### Snap Fastener for use with Fabrics

The invention relates to a snap fastener for use with fabrics, especially those worn on the person or used in the home.

Snap fasteners comprising a male and female member have been used for many years on garments, bed linen and the like. More recently such fasteners have been made of resilient materials such as plastics. Typically, the male and female members each have attachment means that allow the members to be connected to fabric without any need for sewing. For example, the fabric may be sandwiched between a first and second discs, where the first disc forms part of the male or female member.

Such devices are particularly useful for temporarily connecting items of clothing that may become detached during storage or washing; for example, socks.

One problem with known snap fasteners is that they tend to rip the fabric to which they are attached when the male and female members are pulled apart, especially when they are used with stretch fabrics.

The invention seeks to avoid or at least mitigate the problems of the prior-art. In particular the invention seeks to provide a snap fastener that is less likely to damage the fabric to which it is attached when the fastener is undone.

According to a first aspect of the invention there is provided a male stud of a snap fastener comprising a flange with means for attaching to fabric material; the flange having a cylindrical wall extending axially therefrom, the wall comprising a plurality of circumferentially extending engaging portions each engaging portion being circumferentially separated from the next by a circumferentially extending non engaging portion.

According to a second aspect of the invention there is provided a snap fastener comprising: flanged male and female members with means of attaching these to fabric material; the flange of the male member having a first cylindrical wall extending axially therefrom, the wall comprising a plurality of circumferentially extending engaging portions each engaging portion being separated from the next by a circumferentially extending non engaging portion, the engaging portions configured to snap fit within an annular groove defined in a second cylindrical wall of the female member.

An embodiment of the invention will now be described, by way of example only, with reference to the following diagrammatic illustrations, in which:

Figure 1 is a cross section of a male stud according to the invention;

Figure 2 is a plan view of the male stud of Figure 1;

Figure 3 shows the male stud of Figure 2 about to be snapped to a female member;

Figure 4 shows a plan view of a female member according to the invention;

Figure 5 shows a cross section along the lines A to A' of Figure 4

Figure 6 is a plan view of attachment means for fixing the male stud and the female member to fabric; and

Figure 7 is a cross section along lines A to A' of the attachment means shown in Figure 6.

Figures 1 and 2 show a male stud 10 according to the invention comprising a flange portion 12 and a generally cylindrical engaging portion 14. The flange portion 12 is generally disc shaped and has a central slightly tapered bore 16 the remaining annular part 18 of the flange having a plurality of circumferential grooves 20 on the underside 22. The bore 16 is tapered at an angle  $\alpha$  to the axis of the bore 16, where  $\alpha$  is typically  $5^\circ$ . The topside 22 of the flange is integrally formed with the cylindrically engaging portion, which extends axially therefrom. The cylindrically engaging portion 14 comprises a plurality of circumferentially extending arcuate

portions 26, each such portion being separated from the next by a flat faced portion 28. Figure 1 shows five such arcuate and flat faced portions. The internal wall of the cylindrically engaging portion 14 comprises an un-tapered section 30 extending from the flange 12 and a tapered section 32 extending therefrom. This section 32 is tapered outwardly at an angle  $\beta$  to the axis of the cylindrically engaging portion 14, where  $\beta$  is typically  $18^\circ$ . The central part of the external wall 34 of the cylindrically engaging portion also tapers outwardly at an angle  $\beta$  to the axis of bore 16; there being a curved, and preferably arcuate wall portion 36 between the inner and outer tapered walls of the cylindrically engaging portion 14.

A male stud according to the invention may be used with known female sockets. Figures 4 and 5 show such a socket 40 comprising a flange portion 42 similar in configuration to the flange portion 12 of the male stud described above. Flange portion 42 has a generally cylindrically extending female socket portion 44 dimensioned to snugly engage the circumferentially extending arcuate portions 26 of male stud 10.

Figure 3 shows the male stud 10 as it is being engaged within female socket 40. Known male stud members having a continuous curved outer wall 34 may also engage such a socket. However, the flat portions 28 of the male stud according to the invention allow the force required to subsequently separate the male and female members to be controlled. This is achieved by varying the circumferential length of the flat portions 28 relative to the circumferentially extending arcuate portions 26 and also by varying the angle  $\beta$ . By this means this separation force can be chosen to be suitable for a particular fabric. This is especially advantageous when the fastener is being used with so called "stretch fabrics" such as LYCRA<sup>TM</sup>.

In use, the male stud and female socket each need to be fixed to fabric by attachment means. Figures 6 and 7 show a suitable attachment means comprising a post 50 and head 52. Head 52 has a smooth top face 54 and an underface 56 with a

plurality of larger spikes 58 and smaller spikes 60 protruding therefrom. Post 50 extends axially away from the underface 56 and has a tapered of spiked end 62. Thus, in use spike 62 of post 50 pierces the fabric to which it is attached such that this fabric is subsequently held sandwiched between the attachment means and the male stud or female socket by the engaging action of post 50 within the tapered bore 16 of male stud 10 or a similar bore in female socket 40.

While the male stud described above has 5 flat faces the number may vary; for example 7 faces may be used. Preferably, there will be an odd number of flat faces. This will result in a flat face diametrically opposite an arcuate portion; such an arrangement advantageously assists a "peeling action" during disconnection of the male and female members. However, while an odd number of flat and arcuate portions is preferred the invention may be used with an even number of flats and arcuate portions. While the arcuate portions are preferably true arcs of a circle, other curved shapes: for example parabolic portions are possible. Likewise while the flats are preferably simple flat surfaces other configurations are possible; for example a generally "U-shaped" recess between the arcuate portions. The important characteristic is that the flats have a shape that ensures that they do not significantly abut female socket portion 44 during connection. As explained above, this allows a reduced separation force, that can be selected by the designer to suit a particular fabric, compared with a conventional male stud.

The diameter D (see Figure 2) of the engaging portion 34 of the male stud 10 may be 3 to 7 mm, and is preferably about 5 mm. The maximum diameter d (see Figure 1) of tapered bore 16 of the male stud 10 may be 2 to 3 mm, and is preferably about 2.5 mm.

Snap fasteners according to the invention can be made from a variety of materials including plastics, Acetal<sup>TM</sup> resin such as DELRIN<sup>RTM</sup> is particularly suitable.

While angle  $\beta$  of the male stud is preferably about  $18^\circ$  values within the range  $16^\circ$  to  $20^\circ$  and indeed  $13^\circ$  to  $23^\circ$  are possible.


## Claims



1. A male stud of a snap fastner comprising a flange with means of attaching this to fabric material; the flange having a cyclindrical wall extending axially therefrom, the wall comprising a plurality of circumferentially extending engaging portions each engaging portion being separated from the next by a circumferentially extending non engaging portion.
2. A male stud of a snap fastner according to Claim 1 wherein at least one engaging portion extends radially outwards.
3. A male stud of a snap fastner according to any preceding claim wherein the engaging portion is arcuate or parabolic in shape.
4. A male stud of a snap fastner according to any preceding claim wherein the non engaging portion comprises a flat face.
5. A male stud of a snap fastner according to any of Claims 1 to 3 wherein the non engaging portion comprises a recess.
6. A male stud of a snap fastner according to Claim 5 wherein the recess is U-shaped, arcuate shaped or parabolic shaped.
7. A male stud of a snap fastner according to any preceding claim wherein the outer face of the engaging portions are inclined at an angle  $\beta$  to the axis of the cylinder where  $\beta$  is in the range 13 to 23°.
8. A male stud of a snap fastner according to Claim 7 where  $\beta$  is in the range 16 to 20°, and preferably about 18°.

9. A snap fastner comprising: flanged male and female members with means of attaching these to fabric material; the flange of the male member having a first cylindrical wall extending axially therefrom, the wall comprising a plurality of circumferentially extending engaging portions each engaging portion being separated from the next by a circumferentially extending non engaging portion, the engaging portions configured to snap fit within an annular groove defined in a second cylindrical wall of the female member.
10. A snap fastner according to Claim 9 wherein the attaching means comprises a rivet or post member.
11. A snap fastner according to Claim 10 wherein the post member is mushroom shaped.
12. A male stud of a snap fastener comprising a male, engaging portion for cooperating with a female portion in use, the male portion comprising a radially protruding flange having a discontinuous outer curved surface.
13. A male stud of a snap fastener comprising a male, engaging portion for cooperating with a female portion in use, the male portion comprising a radially protruding flange having regions of greater and lesser radial protrusion circumferentially spaced therein thereby to reduce the amount of the outer circumference of the flange which abuts the female portion in use.

**ABSTRACT****Snap Fastener for use with Fabrics**

A snap fastener for use with fabrics comprising a flange having a cyclindrical wall extending axially therefrom, the wall comprising a plurality of circumferentially extending engaging portions each engaging portion being separated from the next by a circumferentially extending non engaging portion.

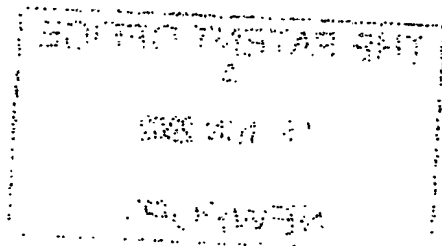

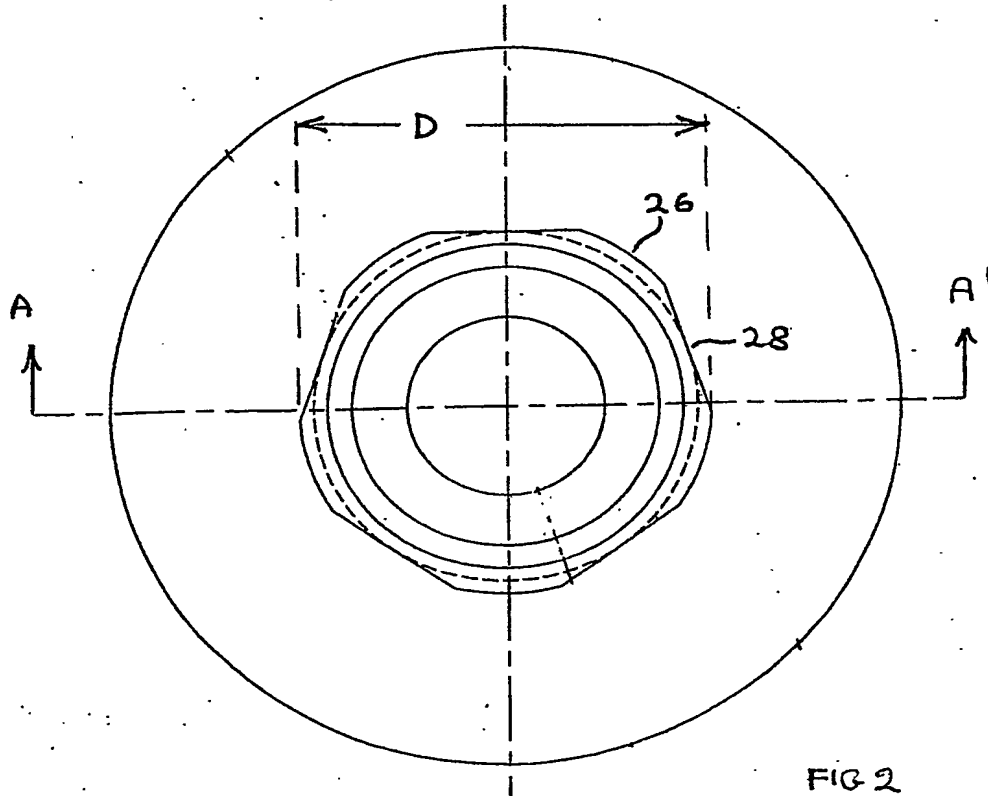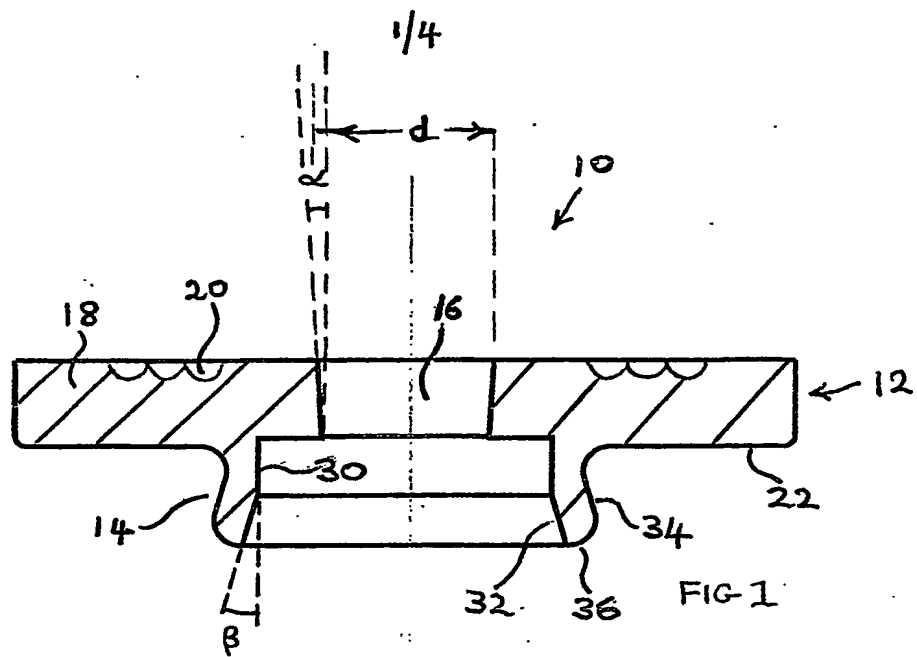

2/4

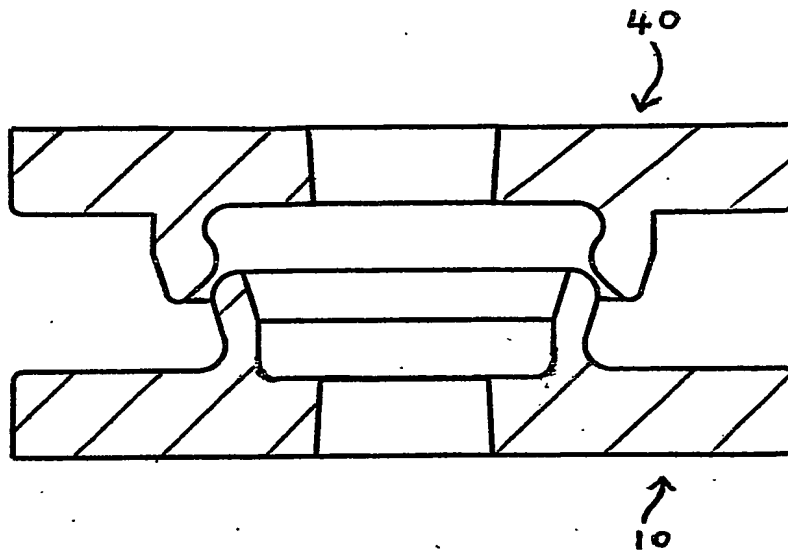


Fig 3

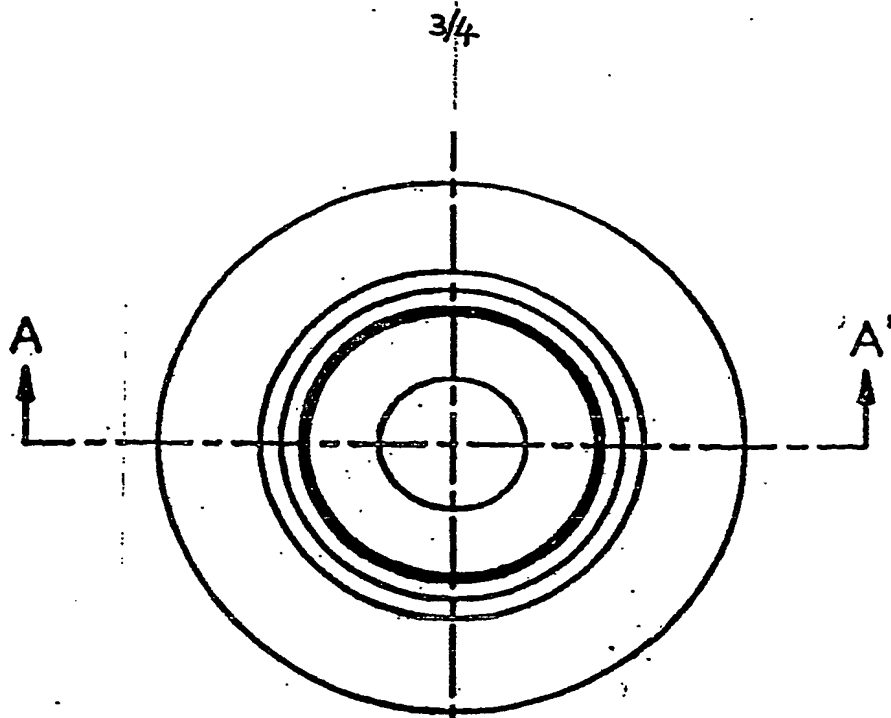


Fig. 4

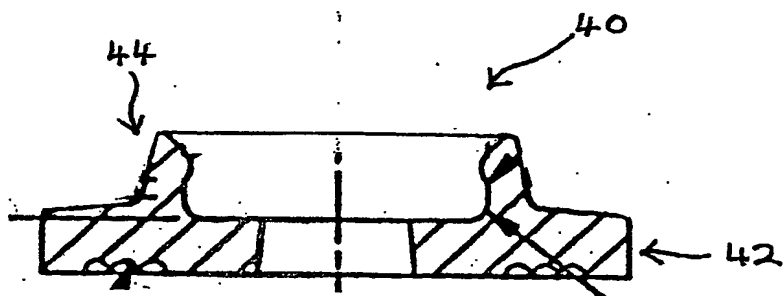


Fig. 5

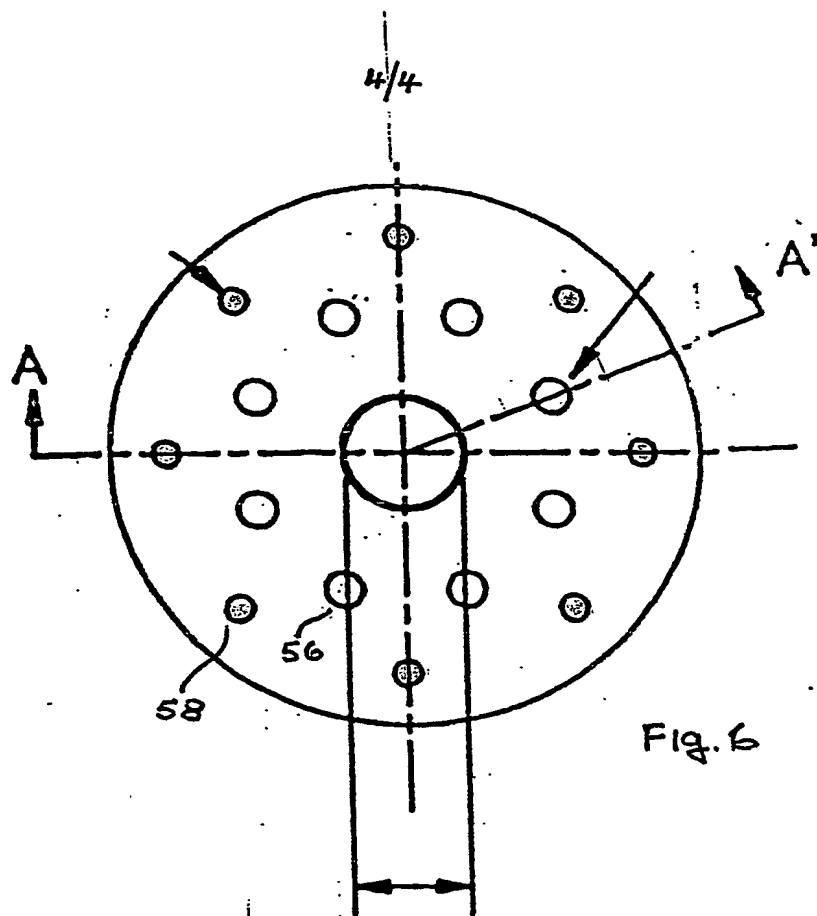


Fig. 6

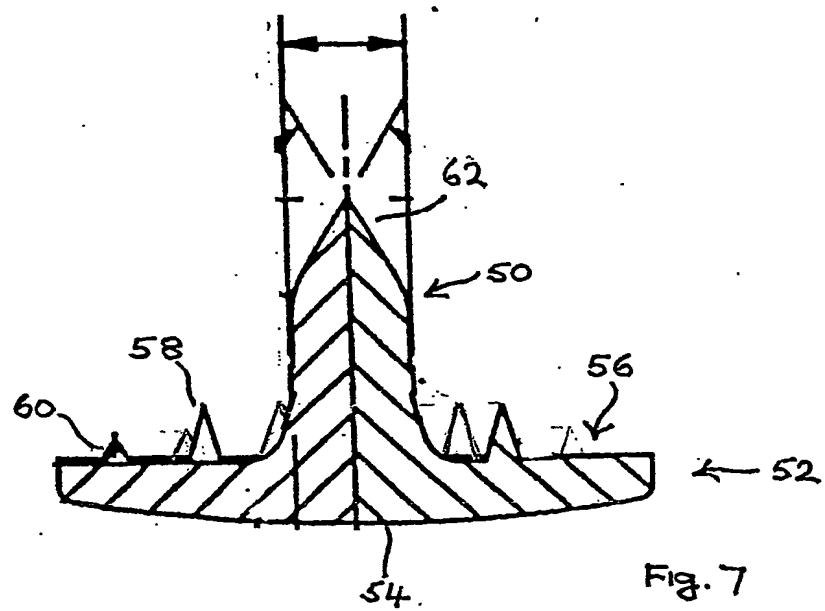


Fig. 7

THE PATENT OFFICE

29 JUL 2003

Received in Patents  
International Unit